

Switching Power Supply

50W Ultra Low Noise AC/DC Switching Power Supply

LFS50 A

Ultra Low Noise AC/DC Switching Power Supply made by Daitron

The breakthrough LFS50A series, compact, light-weight, and high-efficient, provides clean DC power with a complex resonant converter.

The LFS50A switching power supply, keeping leakage current, conducted emission, and radiate emission low is an ideal solution for noise-sensitive applications, especially the equipment used in advanced hyperfine measurement, testing and medical & biotechnology fields.



- ◆ Reinforced Isolation ※ Medical Standard input-to-output
- ◆ Ultra Low Ripple & Noise
- ◆ Low Conducted Emission , Low Radiated Emission
- ◆ Low Leakage Current (0.15mA/at 264Vac)
- ◆ Safety Standard : 62368-1, 60601-1

Specification

		Model Number	LFS50A-5	LFS50A-12	LFS50A-15	LFS50A-24	LFS50A-30	LFS50A-48
Input	Input Voltage Range		Rating 100—240Vac (Range: 85~264Vac)					
	Frequency Range		Rating 50/60Hz (Range: 47Hz~63Hz)					
	Input Current (*1)	ACIN 100V / 200V	0.7A / 0.4A (Io=100%)					
	Inrush Current (*1)	ACIN 100V / 200V	20A / 40A					
	Efficiency (*1)	ACIN 100V / 200V	80% / 82%	85% / 87%	86% / 88%	87% / 89%	87% / 89%	88% / 90%
	Power Factor (*1)	ACIN 100V / 200V	0.97 / 0.86					
Output	Leakage Current	ACIN 100V/240V/264V(60Hz)	0.05mA typ / 0.12mA typ / 0.15mA max					
	DC Output Voltage		5Vdc	12Vdc	15Vdc	24Vdc	30Vdc	48Vdc
	DC Output Voltage Variable Range		4.5~6.0V	10.8~13.2V	13.5~16.5V	21.6~26.4V	27.0~33.0V	43.2~52.8V
	Output Current		10A	4.2A	3.4A	2.1A	1.7A	1.1A
	Maximum Output Power		50.0W	50.4W	51.0W	50.4W	51.0W	52.8W
	Line Regulation / Load Regulation [Max]		40mV / 80mV	48mV / 96mV	60mV / 120mV	96mV / 150mV	120mV / 188mV	192mV / 300mV
Other Feature	Ripple Noise (*2)		10mV typ					
	OCP (*3)		> 110% (Shut down output)					
	OVP (*3)		> 115% (Shut down output)					
	Other		Remote Sensing , Remote Control , Remote Output Voltage Control					
Mechanical	Operation Indicator		LED lighting					
	Cooling System		Convection					
	Size (W x H x D), Weight		82 x 40 x 141 mm / 3.23" x 1.57" x 5.55" inch (Without terminal stand) , 400g					
Environmental Condition	Input & Output Terminal / Signal Terminal		Screw terminal / Connector					
	Operating Temperature / Humidity (*4)		-10 °C ~ 60°C (With output) / 30%RH ~ 90%RH (Non Condensing)					
	Operating atmospheric pressure range (IEC60601-1)		700hPa~1060hPa					
	Storage Temperature / Humidity		-20°C ~ 85°C / 10%RH ~ 95%RH (Non Condensing)					
	Vibration Resistance		19.6m/s ² (10~55Hz 1minute Period 1hour for each X,Y,Z direction)					
Isolation	Shock Resistance		196.1m/s ² 11ms 1time for X,Y,Z direction					
	Isolation Voltage		INPUT - FG : 2kVac(20mA) 1min, INPUT - OUTPUT : 4kVac(20mA) 1min, OUTPUT - FG : 500Vac(20mA) 1min					
Others	Isolation Resistance		INPUT-FG , INPUT-OUTPUT , OUTPUT-FG DC500V >100MΩ					
	Electrostatic Discharge Immunity Test		EN61000-4-2 Compliance					
	Radiated Radio-Frequency Electromagnetic Field Test		EN61000-4-3 Compliance					
	Electrical fast Transient / Burst Immunity Test		EN61000-4-4 Compliance					
	Surge Immunity Test		EN61000-4-5 Compliance					
	Conducted Disturbances Induced by Radio-frequency Immunity Test		EN61000-4-6 Compliance					
	Power Frequency Magnetic Field Immunity Test		EN61000-4-8 Compliance					
	Voltage Dips, short interruptions , voltage variations immunity tests.		EN61000-4-11 Compliance					
	Conducted Emission		EN55022-B, FCC-B, VCCI-B Compliance					
	Safety Certifications		UL62368-1, CAN/CSA-C22.2 NO.62368-1, EN62368-1 Certification PSE Compliance ANSI/AAMI E560601-1, CAN/CSA-C22.2 No.60601-1, EN60601-1 Certification					
	UL File No		E237238(UL62368-1), E320635 (E560601-1)					
	CE Marking		Low voltage directive					
	Harmonic Current Characteristics		EN61000-3-2 (CLASS A) Compliance					

(*1) Conditions : Ta=25 degree C Typical value at maximum output power (Inrush current value doesn't include part of within 0.1msec to input filter)

(*2) The typical ripple voltage in the standard specification is a value measured using 100MHz oscilloscope in the anechoic chamber under the JEITA measuring method (Condition : Ta=25°C, Vin=100Vac Typical value at rated output)

(*3) Upon over voltage or over current conditions, input power must be removed to allow unit reset to occur within a few minutes.

(*4) Derating is required by operating temperature. Follow the overload and specification in manual to avoid the damage of power supply.

※This power supply is intended to be used as a component of a larger system of electrical equipment.

User is responsible for the safe design when this product is to be integrated in the equipment which requires particularly high quality and reliability and there is a possibility to endanger persons or property by a failure or malfunction of this product.



LFS50 A

Mechanical Drawings

TB101

Pin#

- ① L : AC Line
 - ② N : AC Neutral
 - ③ $\perp$: Frame Ground
 - ④ -V : - Output terminal
 - ⑤ +V : +Output terminal
- ※Terminal screws area all M3.5

CN501

Pin#


- ① +S : +Output Remote Sensing
- ② +VS : +Output Voltage Check * The load current can't be supplied
- ③ -S : - Output Remote Sensing
- ④ -VS : - Output VoltageCheck * The load current can't be supplied
- ⑤ VR+ : +Remote Voltage Adjustment
- ⑥ VR- : - Remote Voltage Adjustment
- ⑦ +R : +Remote Control ON/OFF
- ⑧ -R : - Remote Control ON/OFF

CN502 (not included)


for proper connection to CN501

Connector P/N S8B-PHDSS (Manufacturer : JST)
Housing PHDR-08VS

Terminal SPHD-001T-P0.5
Crimping tool AP-K2N

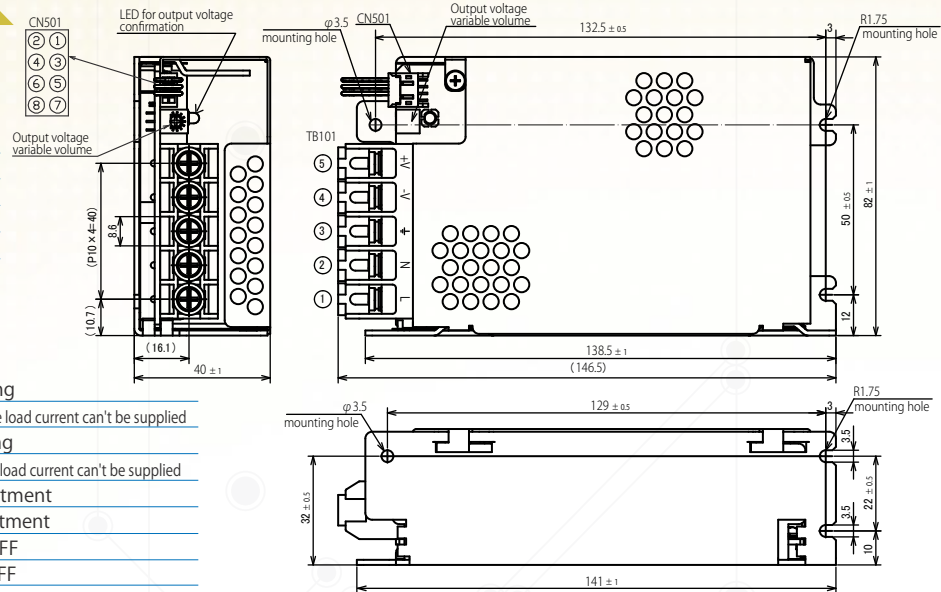

Block Diagram

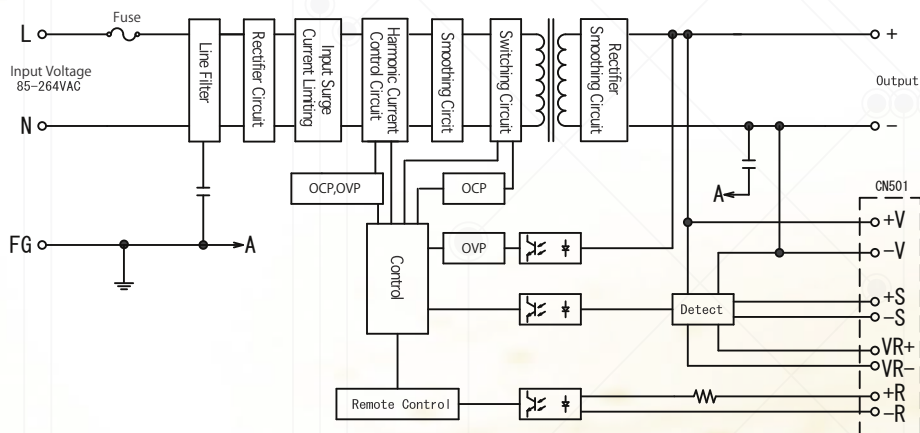

Daitron
DAITRON CO.,LTD.

Product: <https://www.daitronpower.com>Corporate: <https://www.daitronglobal.com>E-mail: ask-global@daitron.co.jp

Head Office

Sales Promotion Dept.

DAITRON INC.

DAITRON (NETHERLANDS) B. V.

DAITRON (KOREA) CO., LTD.

DAITRON (SHANGHAI) CO., LTD.

DAITRON (SHENZHEN) CO., LTD.

DAITRON (H.K.) CO., LTD.

DAITRON (TAIWAN) CO., LTD.

DAITRON (VIETNAM) CO., LTD.

DAITRON (THAILAND) CO., LTD.

DAITRON (MALAYSIA) SDN. BHD.

DAITRON (SINGAPORE) PTE. LTD.

DAITRON CO.,LTD. Manila Office

6-11, Miyahara 4-chome, Yodogawa-ku, Osaka 532-0003, Japan

6, Kojimachi 3-chome, Chiyoda-ku, Tokyo 102-8730, Japan

9720 SW Hillman Court, Suite 805, Wilsonville, Oregon 97070, USA

High Tech Campus 5, 5.053-5.055, 5656AE Eindhoven, The Netherlands

7th Floor, ENC Venture Dream Tower 6 cha, 41, Digital-ro 31-gil, Guro-Gu, Seoul, 08375, Korea

UU Center, 17F 1705-1707, No.1555 Dingxi Road, Changning District, Shanghai, 200050 China

Room J, 24/F, Pacific Commercial & Trade Building, No.4028 Jiabin Road, Luohu District, Shenzhen, 518010 China

Room 806-07, 9 Wing Hong Street, Cheung Sha Wan, Kowloon, Hong Kong

13F, No. 80, Sec. 2, Zhongxiao E. Rd., Zhongzheng Dist., Taipei City, 10050 Taiwan

5th Floor, Toserco Building, No. 273, Kim Ma Street, Giang Vo Ward, Ba Dinh District, Ha Noi City, Viet Nam

75/105(Suite:A) 38th Fl., Ocean Tower 2, Soi Sukhumvit 19 (Wattana), Sukhumvit Road, Khlong Toey Nua, Wattana, Bangkok 10110, Thailand

Level 25 Unit 8, Menara Permata Damansara (Oval Tower) No. 685, Jalan Damansara 60000 Kuala Lumpur, Malaysia

36 Robinson Road, #20-01, City House, Singapore 068877

3F-G Raha Sulayman Building, No.108 Benavidez Street, Legazpi Village, Makati, Metro Manila, 1229 Philippines

Phone: _____

Phone: +81-3-4330-7525

Phone: +1-503-682-7560

Phone: +31-40-2180085

Phone: +82-2-6910-3300

Phone: +86-21-6093-2193

Phone: +86-755-2590-4712

Phone: +852-2838-0682

Phone: +886-2-2394-5134

Phone: +84-28-7109-9832

Phone: +66-2-661-7265

Phone: +60-3-7732-2081

Phone: _____

Phone: +63-2-8550-2832